


SCHOCH DROP WIRES FOR ALL WEAVING MACHINES



An Itema Group Company

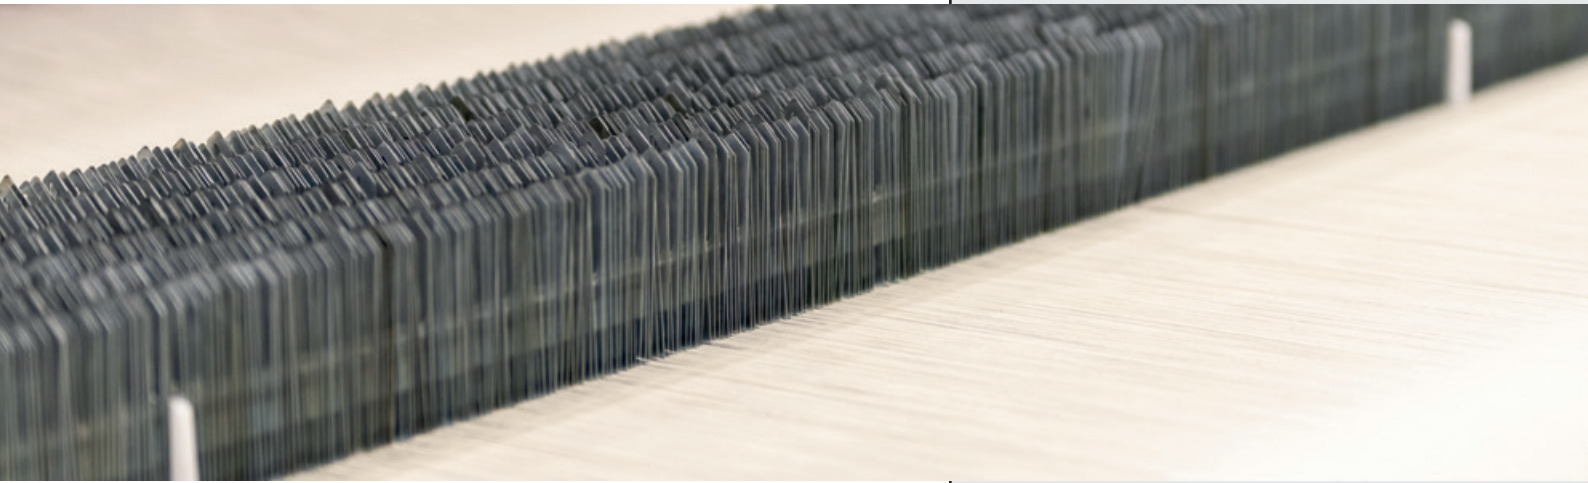


Always attentive to the needs of weavers, Schoch noticed the reduced interest of manufacturers in offering the weaving sector drop wires with a finish capable to significantly reduce the problems of dirt and wear.

In fact, given the performance in terms of speed of weaving machines and the quality requirements of the final product, reducing friction in the weaving phase becomes a crucial factor.

Thanks to Schoch's advanced technology and know-how in the production of profile dents for airjet looms reeds, we designed drop wires with superior technical characteristics in terms of material, surface finish, precision.

Schoch drop wires offer the market the possibility of a superior quality product at a competitive price.

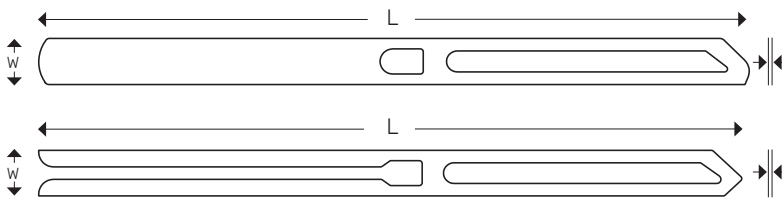

STANDARD DROP WIRES RANGE

All sizes in mm

| Type | Length (L) | Width (W) | Thickness |
|-------|------------|-----------|-----------|
| | | | 0,15 |
| | 140 | 7 | 0,20 |
| CLOSE | 145 | 8 | 0,30 |
| OPEN | 165 | 11 | 0,40 |
| | 180 | | 0,50 |

BENEFITS

- Greater surface polish
- Lower production of dust and dirt thanks to the high finishing of sections
- Superior steel hardness of the tempered stainless-steel
- Ideal for demanding customers and in case of delicate yarns
- Suitable for all type of automatic drawing-in machines
- Excellent price-quality ratio

MAIN TECHNICAL INFORMATION

- Available in closed and open version
- Quality of stainless steel SUS420J2
- Thickness up to 2.00mm upon request
- Customized solutions and ad-hoc design always available
- Not available in nickel or zinkate quality
- Technical data according to ISO441 and ISO1150 standards

PACKAGED IN BOXES 35x18,5x5 CM



www.schoch.it

+39 035 513353

info@schoch.it